


ARMOUR RINGS

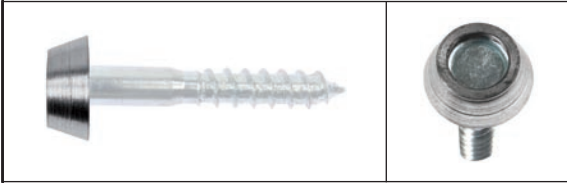


Armour Rings™ provide a simple yet highly effective method to make standard hex head bolts, nuts and screws tamper resistant. After conventional tightening of the fastener the conical rings are knocked into place using a hammer and so do not limit the torque the fastener requires.

SIZES AVAILABLE (SUPPLIED IN PACKS OF 10)

The armour rings are only available for 13mm hex-head bolts and are supplied in packs of 10. Please use the order code below.

ORDER CODE: BTS/AR-M8

The bright zinc plated steel rings provide a clean look and can be retrofitted to any 13mm BS or DIN standard hexagon head bolts, nuts and screws. Compatible with all B-Tech supplied 13mm coach screws used for wall mounting products.

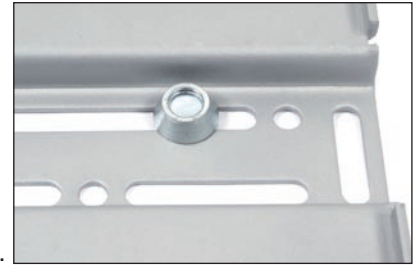

Bolt / Screw not included

PIN HEX MACHINE SCREW



The pin hex system uses a simple yet effective method of adding tamper resistance to AV equipment. The head comprises of a protruding pin inside a standard hexagon socket recess. The addition of the internal pin prevents removal using standard hexagon keys. Removal of a pin hex security fastener is very difficult without the matching drive tool.

SIZES AVAILABLE (SUPPLIED IN PACKS OF 12)

The table below shows the size availability of the pin hex machine screws. To order, please quote the prefix shown in red below and the suffix for the specific screw you require shown in red in the table below. For example, to order an M4 x 10mm screw, use order code BTS/PHM4-10.



**ORDER CODE PREFIX: BTS/PHM -
USE SUFFIX FROM TABLE BELOW**

Length Size \ (L)	10mm	12mm	16mm	25mm	30mm	40mm	50mm	60mm	Driver Size
M4	4-10		4-16	4-25					2.5mm
M5		5-12	5-16		5-30				3mm
M6		6-12	6-16	6-25					4mm
M8		8-12	8-16	8-25		8-40	8-50	8-60	5mm

PIN HEX SELF TAPPING



SIZES AVAILABLE (SUPPLIED IN PACKS OF 12)

The table below shows the size availability of the pin hex grub screws. To order, please quote the prefix shown in red below and the suffix for the specific screw you require shown in red in the table on the right. For example, to order an M5 x 8mm screw, use order code BTS/PHGSM5-8.

ORDER CODE PREFIX: BTS/PHTM - USE SUFFIX FROM TABLE TO THE RIGHT

PIN HEX DRIVE TOOLS (SUPPLIED INDIVIDUALLY)

Size Type	2.5mm Driver	3mm Driver	4mm Driver	5mm Driver
Insert Bit	BTS/PHT-M4B	BTS/PHT-M5B	BTS/PHT-M6B	BTS/PHT-M8B
Wrench	BTS/PHT-M4W	BTS/PHT-M5W	BTS/PHT-M6W	BTS/PHT-M8W

Length Size \ (L)	1½" (38mm)	Driver Size
8G (4.2mm)	8-1.5	4mm
10G (4.2mm)	10-1.5	4mm
12G (4.2mm)	12-1.5	4mm
14G (4.2mm)	14.1.5	4mm

